

**LD-P**

Iz pocinkane pločevine  
pripravljena za pogon

**Opis**

Krožna regulacijska loputa za pretok zraka.

**Material**

Pocinkana pločevina.

**Izvedbe**


LD/R: Krožna loputa z ročno nastavitvijo pretoka.

LD/M: Krožna loputa, pripravljena za motorni pogon.


**Dimenzije**

| Premer [mm] | Dolžina [mm] | Debelina pločevine[mm] | Pin [mm] |
|-------------|--------------|------------------------|----------|
| 80          | 200          | 8/10                   | 12       |
| 100         | 200          | 8/10                   | 12       |
| 125         | 200          | 8/10                   | 12       |
| 150         | 200          | 8/10                   | 12       |
| 160         | 200          | 8/10                   | 12       |
| 180         | 200          | 8/10                   | 12       |
| 200         | 200          | 8/10                   | 12       |
| 224         | 200          | 8/10                   | 12       |
| 250         | 200          | 8/10                   | 12       |
| 300         | 300          | 10/10                  | 12       |
| 315         | 400          | 10/10                  | 12       |
| 355         | 400          | 10/10                  | 12       |
| 400         | 400          | 10/10                  | 12       |
| 450         | 400          | 10/10                  | 12       |
| 500         | 500          | 15/10                  | 12       |
| 560         | 500          | 15/10                  | 12       |
| 600         | 500          | 15/10                  | 12       |
| 630         | 500          | 15/10                  | 12       |
| 710         | 500          | 15/10                  | 12       |

## Diagram

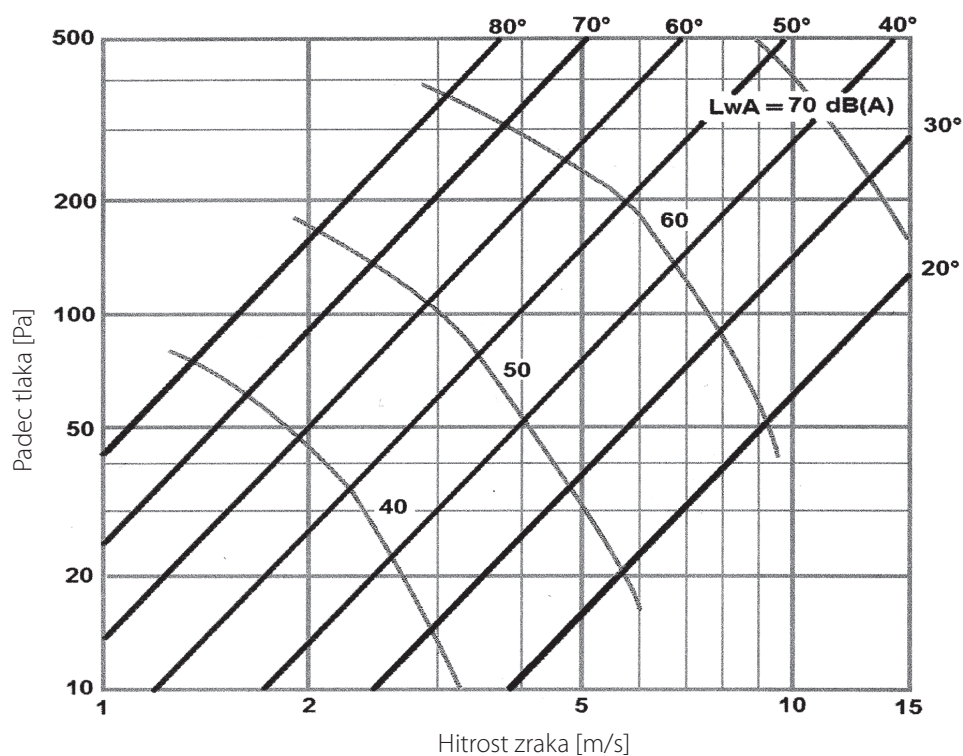

## Diagram za hitro izbiro

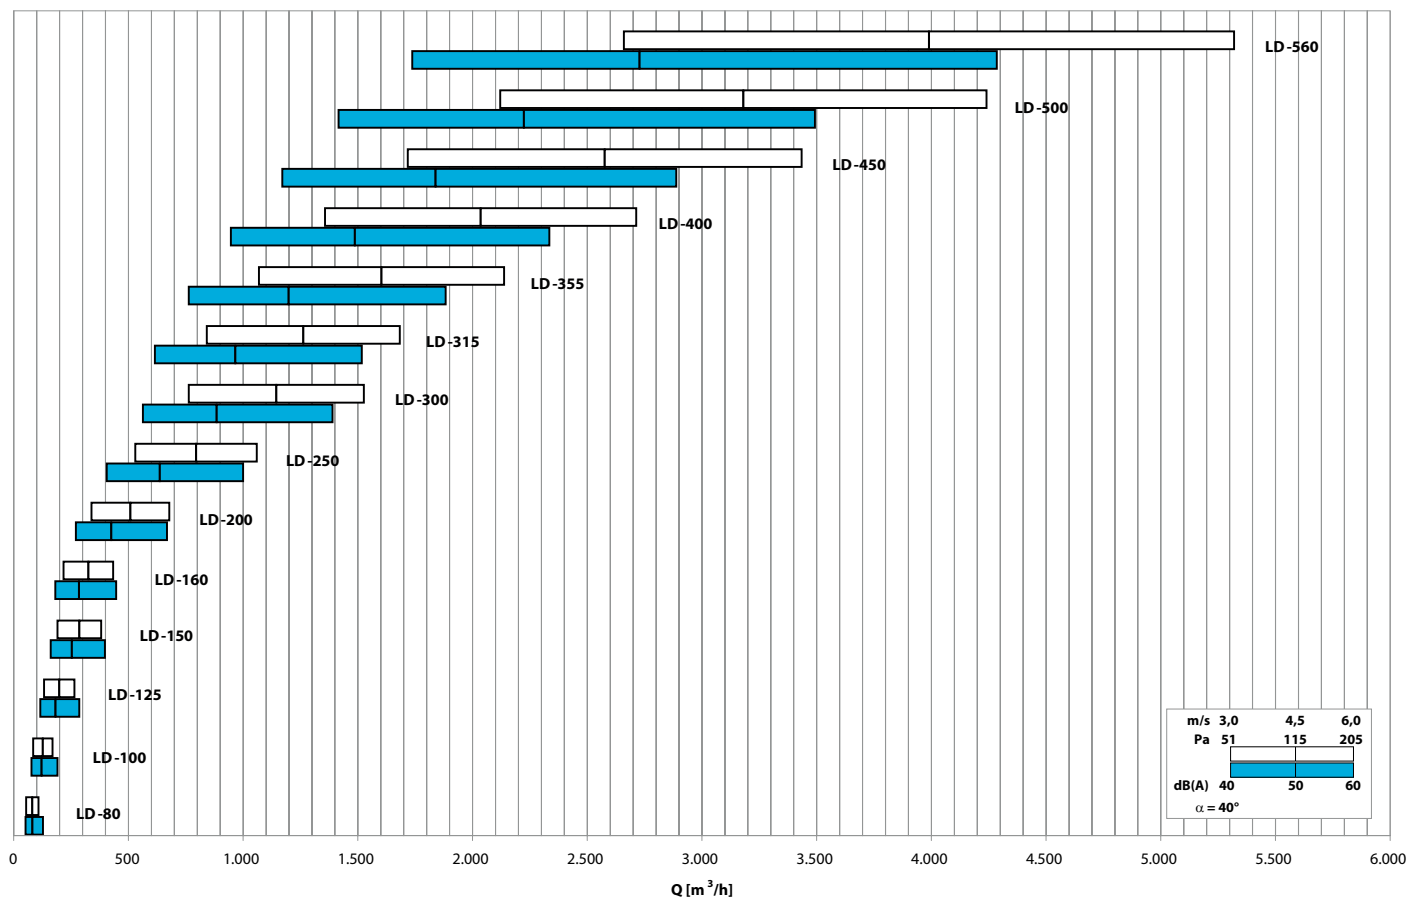

## Izbirna tabela

| Model  | A <sub>1</sub> [m <sup>2</sup> ] | Q [m <sup>3</sup> /h] |       | Q [m <sup>3</sup> /h] |       | D <sub>p</sub> (α=40°) [Pa] |       | L <sub>WA</sub> (α=40°) [dB(A)] |       |
|--------|----------------------------------|-----------------------|-------|-----------------------|-------|-----------------------------|-------|---------------------------------|-------|
|        |                                  | min.                  | maks. | min.                  | maks. | min.                        | maks. | min.                            | maks. |
| LD-8   | 0,0050                           | 3                     | 6     | 50                    | 110   | 51                          | 205   | 41                              | 58    |
| LD-100 | 0,0079                           | 3                     | 6     | 80                    | 170   | 51                          | 205   | 42                              | 58    |
| LD-125 | 0,0123                           | 3                     | 6     | 130                   | 270   | 51                          | 205   | 43                              | 58    |
| LD-150 | 0,0177                           | 3                     | 6     | 190                   | 380   | 51                          | 205   | 44                              | 58    |
| LD-160 | 0,0201                           | 3                     | 6     | 220                   | 430   | 51                          | 205   | 44                              | 58    |
| LD-180 | 0,0254                           | 3                     | 6     | 270                   | 550   | 51                          | 205   | 45                              | 58    |
| LD-200 | 0,0314                           | 3                     | 6     | 340                   | 680   | 51                          | 205   | 45                              | 61    |
| LD-224 | 0,0394                           | 3                     | 6     | 430                   | 850   | 51                          | 205   | 45                              | 61    |
| LD-250 | 0,0491                           | 3                     | 6     | 530                   | 1060  | 51                          | 205   | 46                              | 61    |
| LD-300 | 0,0707                           | 3                     | 6     | 760                   | 1530  | 51                          | 205   | 47                              | 61    |
| LD-315 | 0,0779                           | 3                     | 6     | 840                   | 1680  | 51                          | 205   | 47                              | 61    |
| LD-355 | 0,0990                           | 3                     | 6     | 1070                  | 2140  | 51                          | 205   | 47                              | 61    |
| LD-400 | 0,1257                           | 3                     | 6     | 1360                  | 2710  | 51                          | 205   | 48                              | 62    |
| LD-450 | 0,1590                           | 3                     | 6     | 1720                  | 3440  | 51                          | 205   | 48                              | 62    |
| LD-500 | 0,1963                           | 3                     | 6     | 2120                  | 4240  | 51                          | 205   | 49                              | 62    |
| LD-560 | 0,2463                           | 3                     | 6     | 2660                  | 5320  | 51                          | 205   | 49                              | 62    |
| LD-600 | 0,2827                           | 3                     | 6     | 3050                  | 6110  | 51                          | 205   | 50                              | 62    |
| LD-630 | 0,3117                           | 3                     | 6     | 3370                  | 6730  | 51                          | 205   | 50                              | 63    |

## Ključ za naročanje

**LD / 200 / R**

- R - ročna regulacija
- M - priprava za motorni pogon
- Velikost
- Krožna regulacijska loputa