



## Characteristics

Quick installation spigot for flexible hose. Suitable for installation on plenums whose total thickness does not exceed 20 mm.

## Material

High strength white ABS.


## Fixing

Quick installation of the two parts forming the spigot with a special ring system.

## Accessories

3 position equalizer damper.

## Drawings

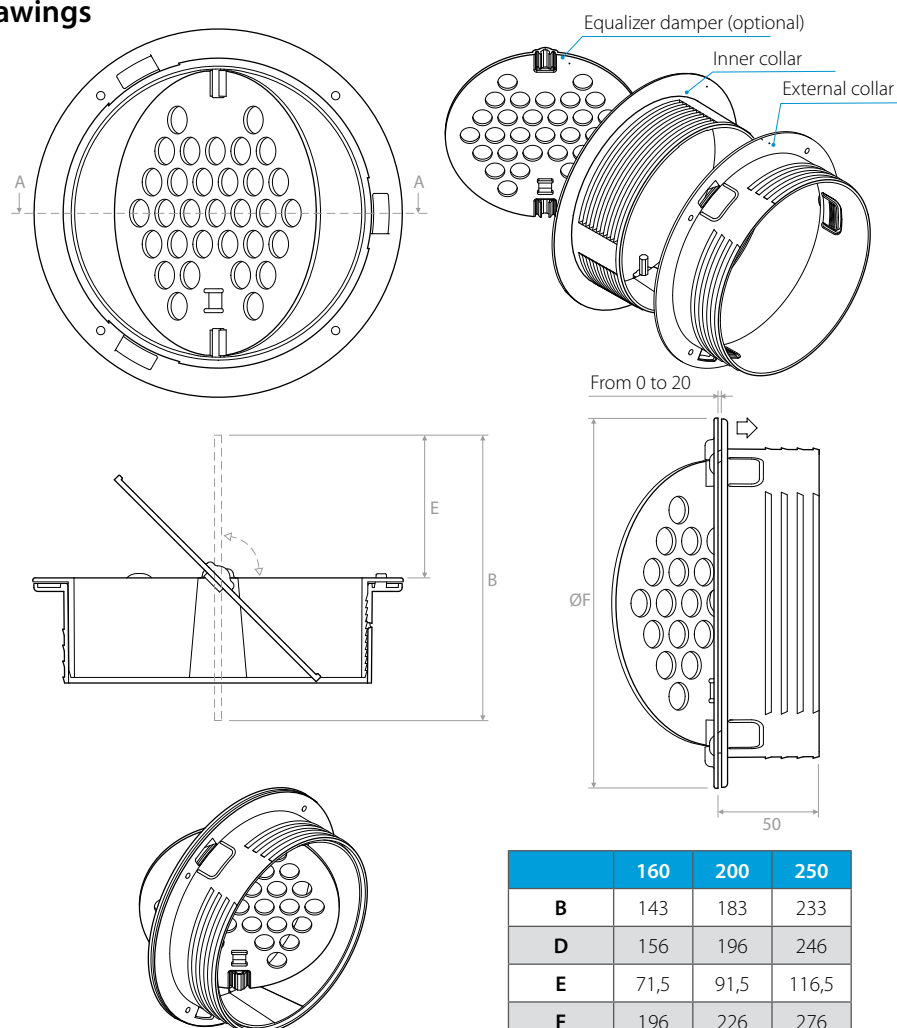

|          | 160  | 200  | 250   |
|----------|------|------|-------|
| <b>B</b> | 143  | 183  | 233   |
| <b>D</b> | 156  | 196  | 246   |
| <b>E</b> | 71,5 | 91,5 | 116,5 |
| <b>F</b> | 196  | 226  | 276   |