


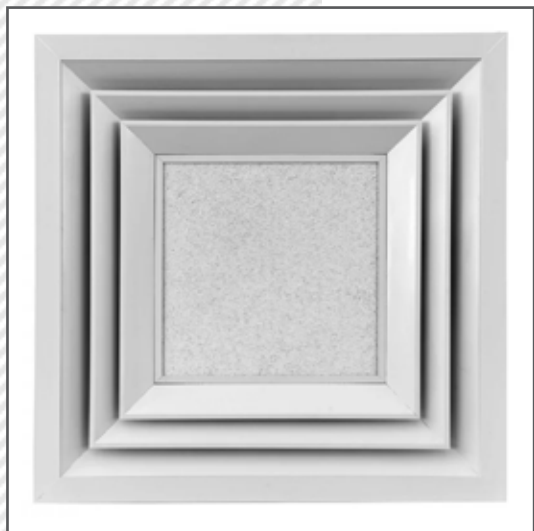

Characteristics

Multidirection diffuser with 4 ways with matched central panel.
For modular false-ceiling installation.
Installation height: 2,5-3,1 m.


Material

Aluminium painted RAL 9010.



Fixing

Fixing on false-ceiling.


Drawings

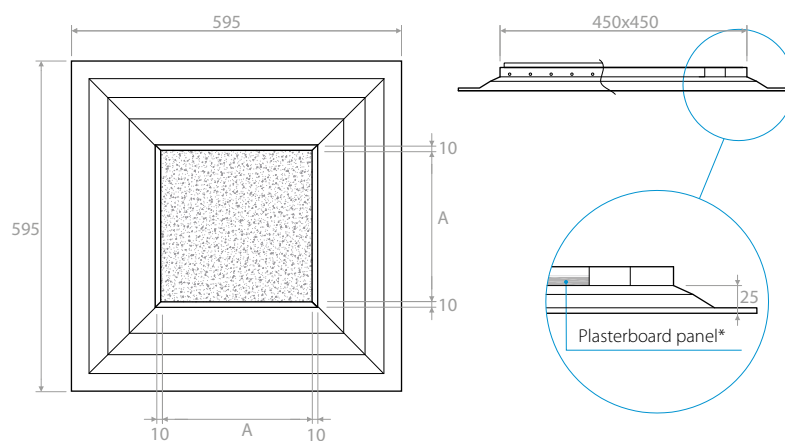

* Central part not supplied

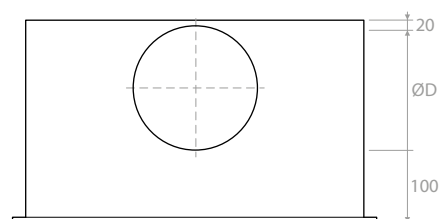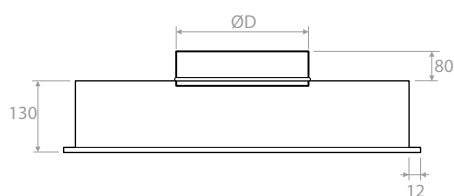

Quick selection diagram

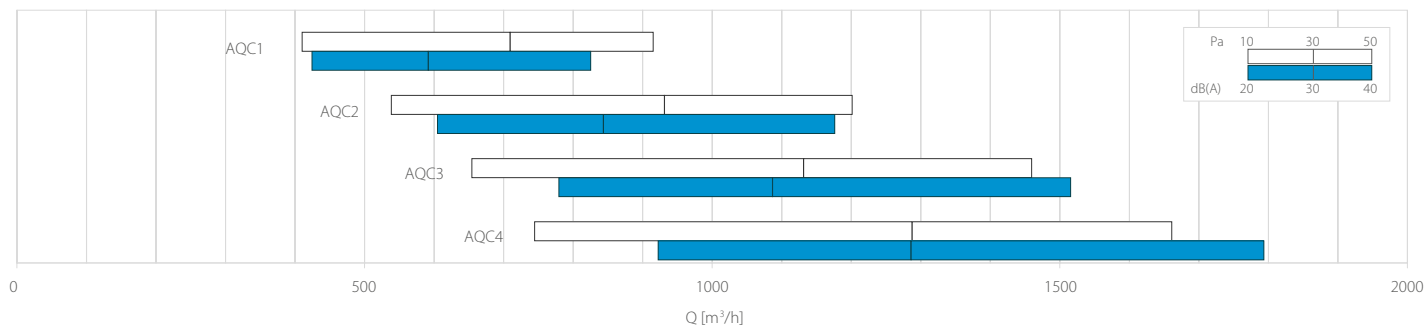

Selection table

Model	A_k [m²]	No. way	Q [m³/h]		L_{WA} [dB(A)]		$X_{(0,25)}$ [m]		Dp_t [Pa]	
			min.	max.	min.	max.	min.	max.	min.	max.
AQC1F	0,0438	4	410	920	< 20	43	1,26	6,29	10	50
AQC2F	0,0542	4	540	1200	< 20	41	1,22	6,10	10	50
AQC3F	0,0631	4	650	1460	< 20	39	1,19	5,97	10	50
AQC4F	0,0698	4	740	1660	< 20	38	1,18	5,88	10	50