



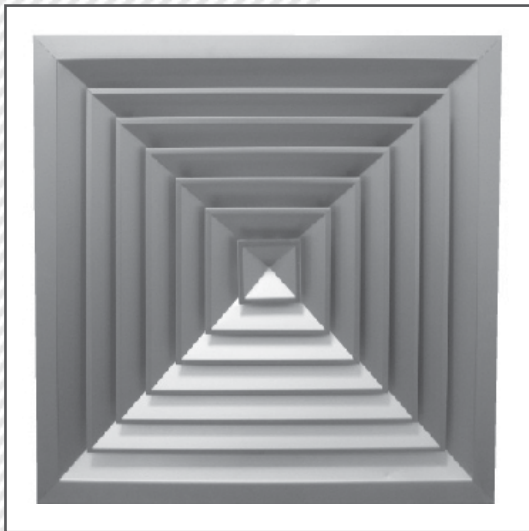

- Characteristics** Multidirection 4-way diffusers with removable central part.
- Material** Aluminium.
- Finish** Anodised / RAL 9010.
- Fixing** Fixing by concealed fixing screws inserted in the diffuser neck.
- Accessories** R: Opposed blade damper
K: Connecting plenum


AQNA

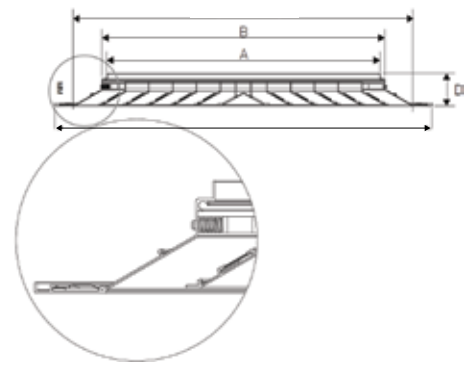


AQNA-R




KK-V



KK-H



Security installation

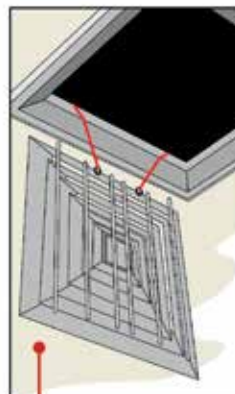

Security system



Spigot plenum K1 / K2


$B \times H$ [mm]	$\varnothing D$
150 x 150	122
225 x 225	147
300 x 300	197
375 x 375	197
450 x 450	247
600 x 600	297

AQNA Dimensions [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
150 × 100	128	144	294	50	240 × 240
225 × 225	203	219	369	50	315 × 315
300 × 300	278	294	444	50	390 × 390
375 × 375	353	369	519	50	465 × 465
450 × 450	428	444	594	50	540 × 540
600 × 600	580	597	745	50	690 × 690

Diagram of selection

CONDITIONS: valid with ceiling effect; terminal velocity = 0,5 m/s

occupied zone relative velocity = 0,17 m/s; height of installation site = 2,8 m +/- 0,3 m

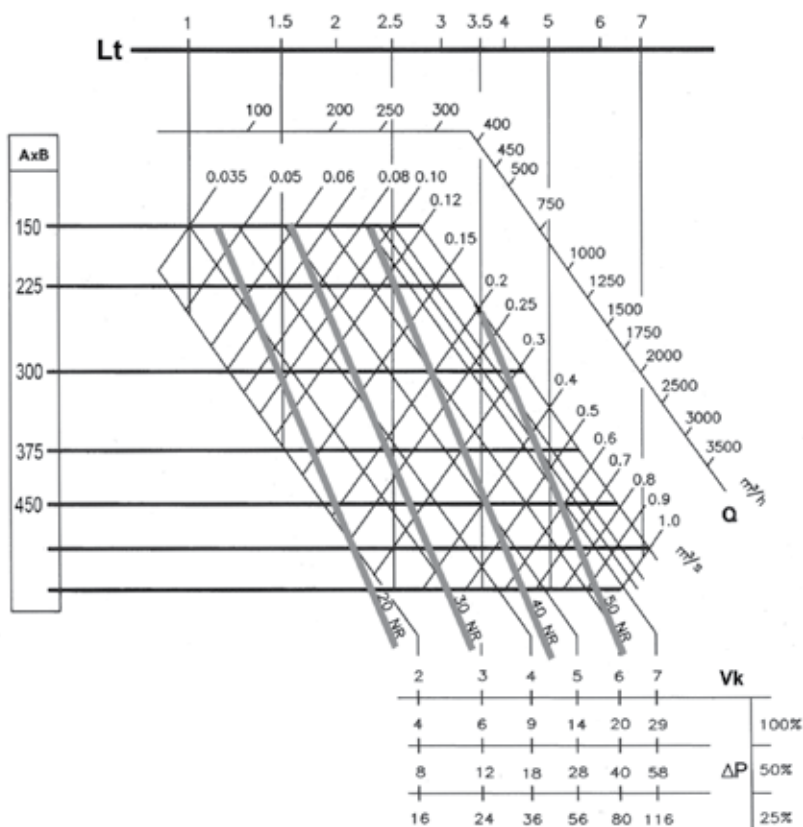

Order key

AQNA – R / 300 x 300

Size

With quantity adjustment set

Ceiling air vents

SYMBOL	DESCRIPTION
Q	Air flow [m³/s, m³/h]
NR	Noise level
DP	Pressure drop [Pa]
Vk	Air delivery velocity [m/s]
Lt	Throw [m]