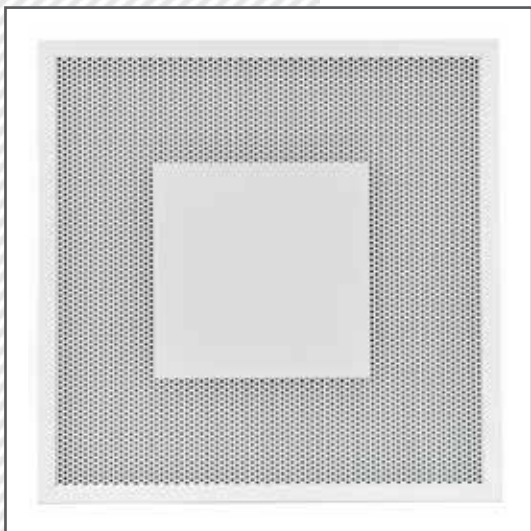


**Characteristics**

Perforated face square diffusers with central plug, 595x595 mm overall size.

For ceiling installation and for air intake (BQF-SM) and delivery (BQF-SMF). Installation height: 2,5-4,0 m.

Material

Frame in aluminium, perforated sheet steel painted white RAL 9010.

Fixing

Clips (frontal screws on request).

Accessories

Galvanized steel plenum, standard or insulated, with or without equalizer sheet.

Calibration damper made of galvanized steel and fins with opposite movement.

Deflectors for throw orientation.

BQC-M z deflektorji

NR	Q zračni tok	P padec tlaka	V hitrost zraka
20	430	7	1,2
30	660	17	1,8
40	1000	38	2,8

Višina montaže: 2,5 - 3,5 m.

BQC-R brez deflektorjev

NR	Q zračni tok	P padec tlaka	V hitrost zraka
20	1250	7	1,5
30	1800	16	2,4
40	2600	35	3,8


Višina montaže: 2,5 - 3,5 m.

Drawings and dimensions:


BQC




KK-V




KK-H



KK-V-I*




KK-H-I*




* Plenum externally insulated thickness 6 mm.

Quick selection diagram

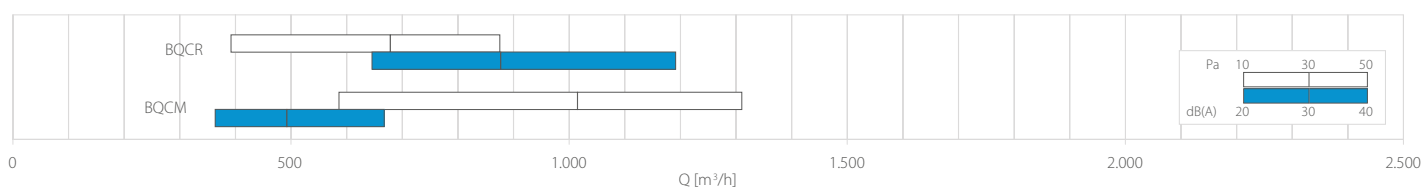

Selection table

Model	A_k [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		$X_{(0,25)}-Y_{(0,25)}$ [m]		Dp_t [Pa]	
		min	max	min	max	min	max	min	max
BQCM	0,1044	590	1310	36	62	1,8	4,0	10	50
BQCR	0,1044	390	880	< 20	30	-	-	10	50

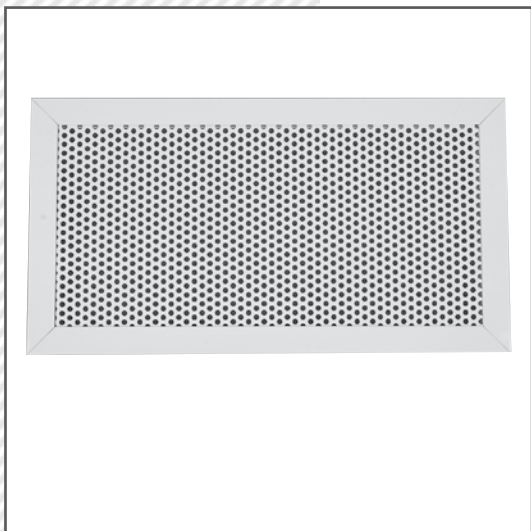

Characteristics

Perforated face return grilles.
For wall installation and for air intake.

Material

Frame made of RAL 9010 white painted aluminium.
Panel made of RAL 9010 white painted steel.


Fixing

Pritrditev s sponami ali z vijaki (po naročilu).


Accessories

Galvanized steel plenum, standard or insulated.
Calibration damper made of galvanized steel and fins with opposite movement.
Mounting counterframes made of galvanized steel sheet.

Drawings and dimension

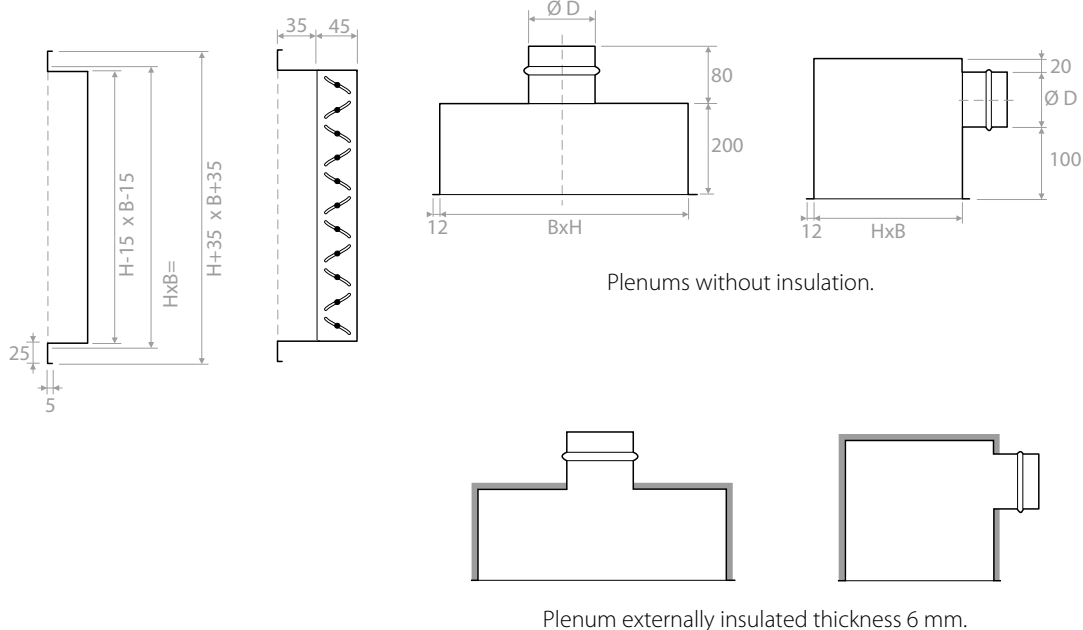

Quick selection diagram

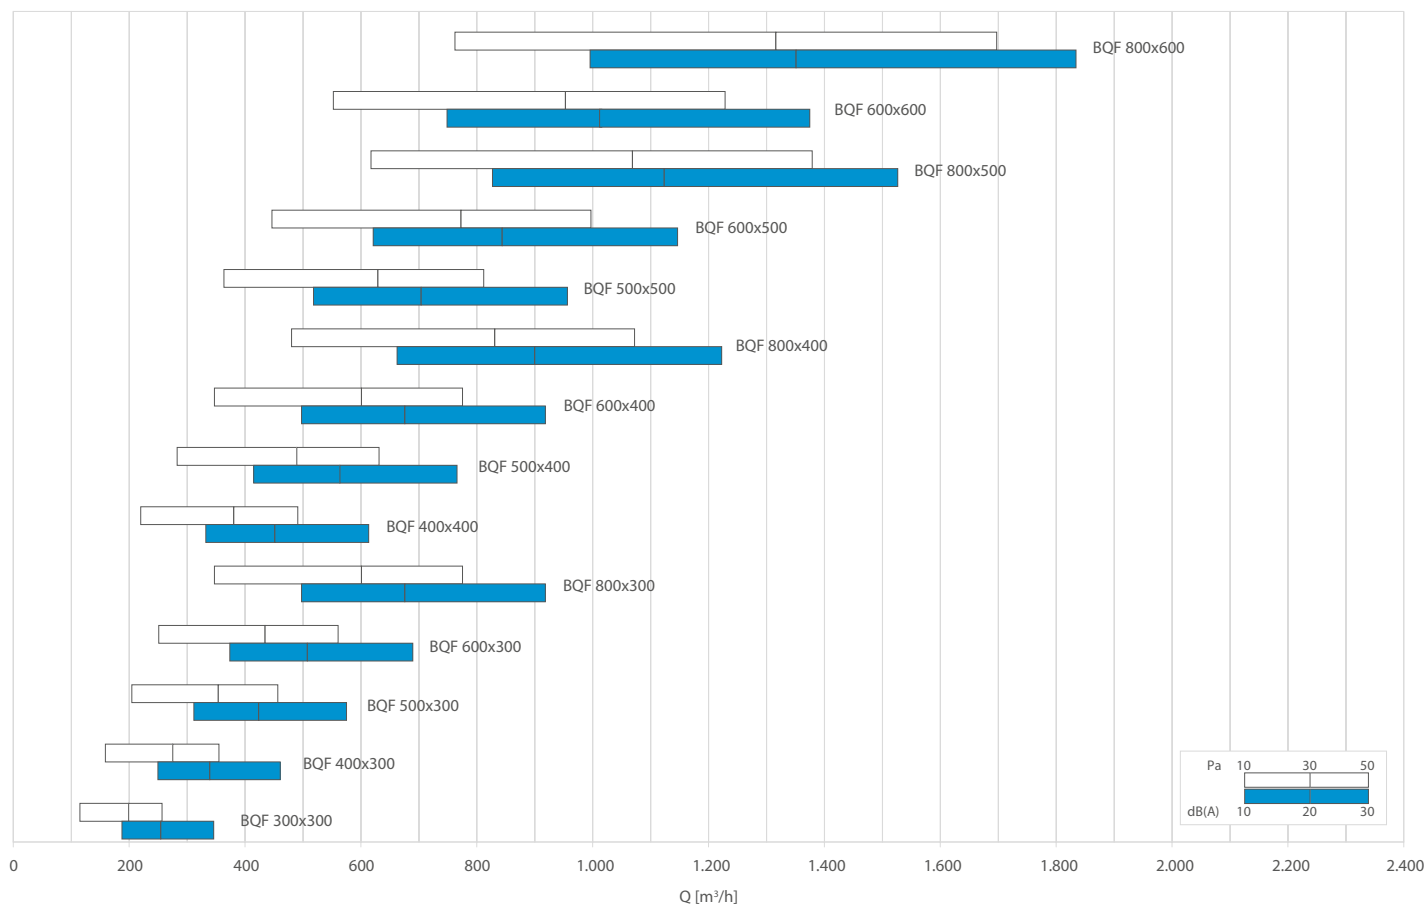

Selection table

Model	A_k [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		Dp_i [Pa]	
		min	max	min	max	min	max
BQF 300x300	0,0305	120	260	-	21	10	50
BQF 400x300	0,0422	160	360	-	22	10	50
BQF 500x300	0,0543	200	460	-	23	10	50
BQF 600x300	0,0668	250	560	-	23	10	50
BQF 800x300	0,0924	350	780	-	25	10	50
BQF 1000x300	0,1190	450	1000	-	26	10	50
BQF 400x400	0,0584	220	490	-	23	10	50
BQF 500x400	0,0752	280	630	-	24	10	50
BQF 600x400	0,0924	350	780	-	25	10	50
BQF 800x400	0,1280	480	1070	-	26	10	50
BQF 1000x400	0,1647	620	1380	-	27	10	50
BQF 500x500	0,0968	360	810	-	25	10	50
BQF 600x500	0,1190	450	1000	-	26	10	50
BQF 800x500	0,1647	620	1380	-	27	10	50
BQF 1000x500	0,2120	790	1770	-	28	10	50
BQF 600x600	0,1462	550	1220	-	26	10	50
BQF 800x600	0,2025	760	1690	-	27	10	50
BQF 1000x600	0,2606	980	2180	-	28	10	50