


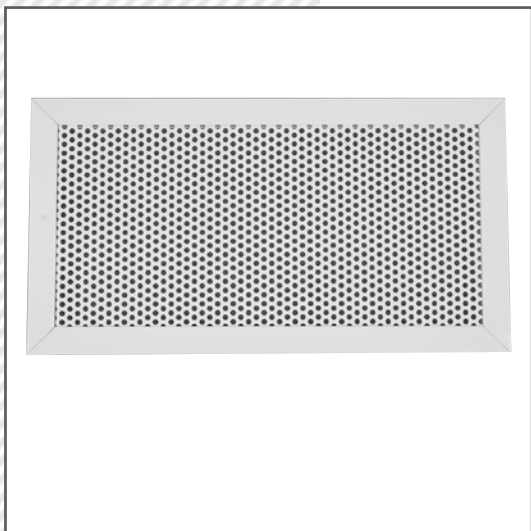

Characteristics

Perforated face return grilles.
For wall installation and for air intake.

Material

Frame made of RAL 9010 white painted aluminium.
Panel made of RAL 9010 white painted steel.



Fixing

Pritrditev s sponami ali z vijaki (po naročilu).

Accessories


Galvanized steel plenum, standard or insulated.
Calibration damper made of galvanized steel and fins with opposite movement.
Mounting counterframes made of galvanized steel sheet.

Drawings and dimension

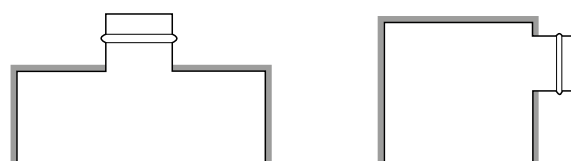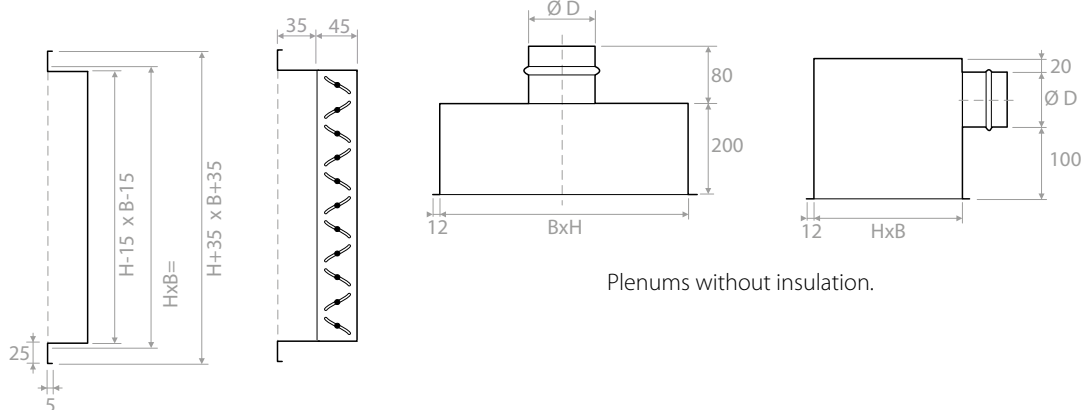

Plenum externally insulated thickness 6 mm.

Quick selection diagram

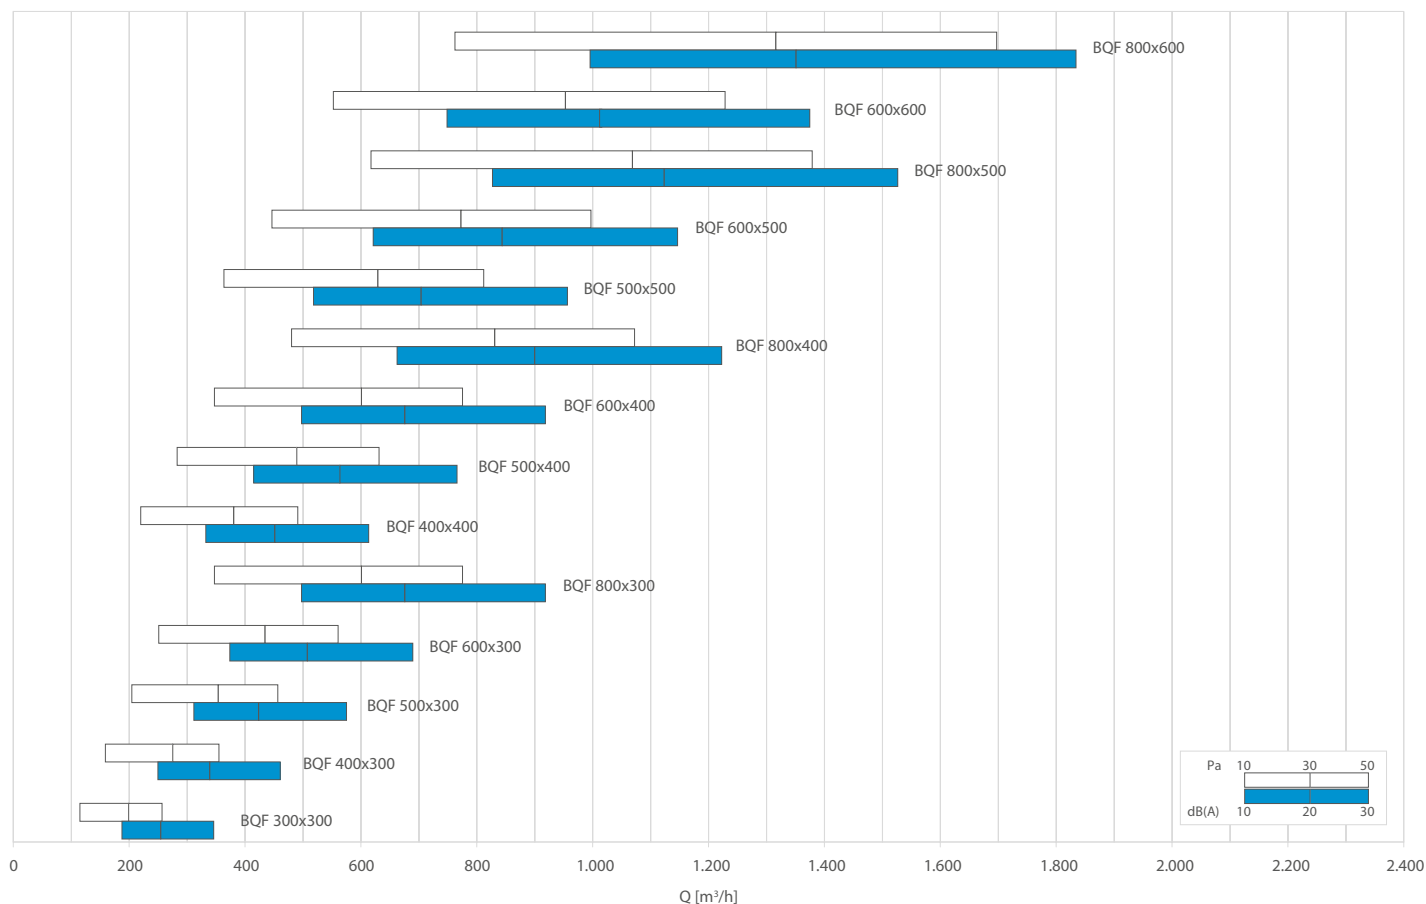

Selection table

Model	A_k [m ²]	Q [m ³ /h]		L_{WA} [dB(A)]		Dp_i [Pa]	
		min	max	min	max	min	max
BQF 300x300	0,0305	120	260	-	21	10	50
BQF 400x300	0,0422	160	360	-	22	10	50
BQF 500x300	0,0543	200	460	-	23	10	50
BQF 600x300	0,0668	250	560	-	23	10	50
BQF 800x300	0,0924	350	780	-	25	10	50
BQF 1000x300	0,1190	450	1000	-	26	10	50
BQF 400x400	0,0584	220	490	-	23	10	50
BQF 500x400	0,0752	280	630	-	24	10	50
BQF 600x400	0,0924	350	780	-	25	10	50
BQF 800x400	0,1280	480	1070	-	26	10	50
BQF 1000x400	0,1647	620	1380	-	27	10	50
BQF 500x500	0,0968	360	810	-	25	10	50
BQF 600x500	0,1190	450	1000	-	26	10	50
BQF 800x500	0,1647	620	1380	-	27	10	50
BQF 1000x500	0,2120	790	1770	-	28	10	50
BQF 600x600	0,1462	550	1220	-	26	10	50
BQF 800x600	0,2025	760	1690	-	27	10	50
BQF 1000x600	0,2606	980	2180	-	28	10	50