
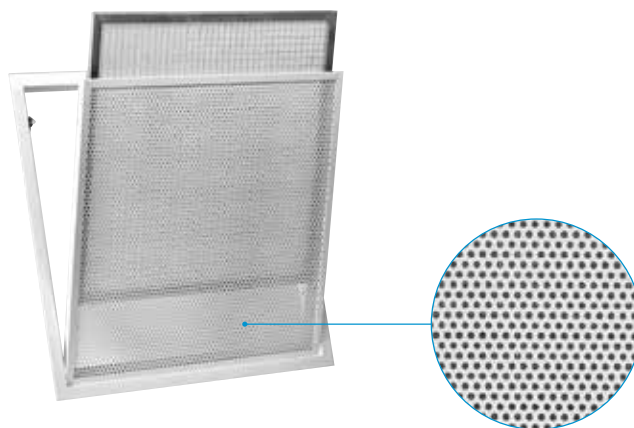


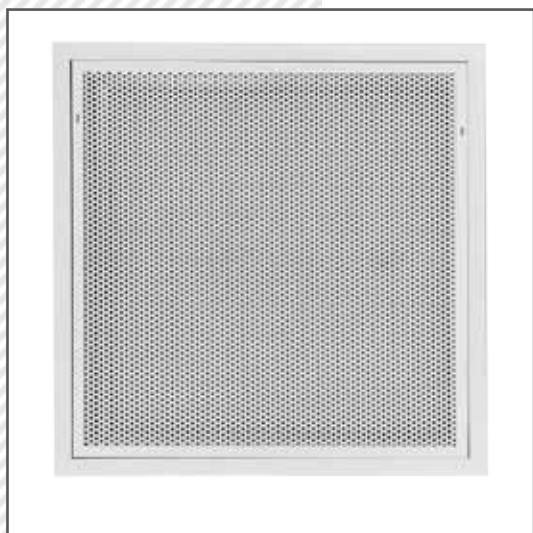

Characteristics

Perforated face square diffusers predisposed for filter insertion.
False ceiling installation for air return, 595x595 mm overall size.
Installation height: 2,5-4,0 m

Material

Frame in aluminium, perforated sheet steel painted white RAL 9010.







Fixing

Clips (frontal screws on request).

Accessories


Galvanized steel plenum, standard or insulated, with or without equalizer sheet.

Drawings and dimensions

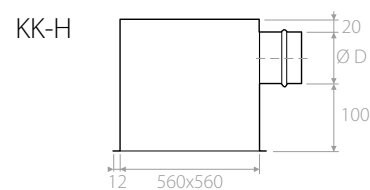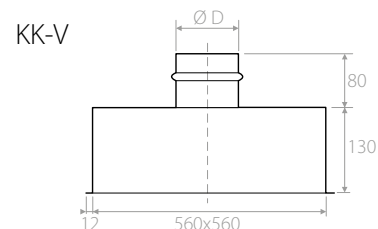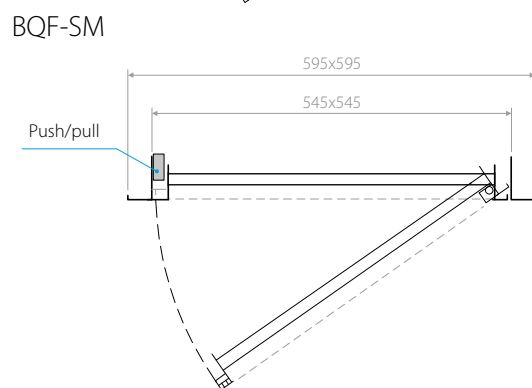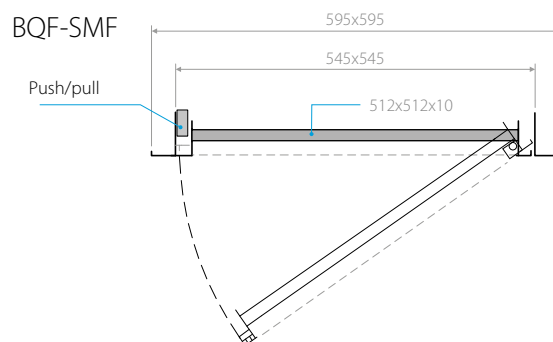

* Plenum externally insulated thickness 6 mm.

Quick selection diagram

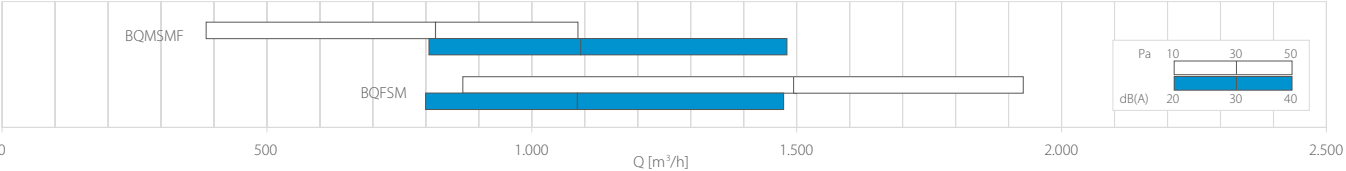

Selection table

Model	A _k [m²]	Q [m³/h]		L _{WA} [dB(A)]		X _(0,25) -Y _(0,25) [m]		Dp _t [Pa]	
		min	max	min	max	min	max	min	max
BQFSM	0,1431	800	1800	37	63	3,5	7,9	10	50
BQFSMF	0,1431	380	1080	< 20	47	-	-	10	50

