


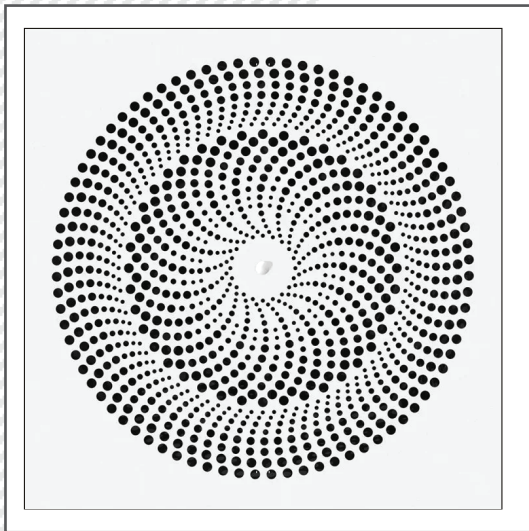

## Characteristics

Panel diffuser pulse type with high inductive capacity.  
For ceiling installation supply operation.  
Installation height 2,7 - 4,1 m.

## Material

RAL 9010 white painted steel.



## Fixing

Fixing by using lateral screws or central screw on mounting bridge.

## Accessories

Galvanized steel plenum, standard or isolated, with or without equalizer sheet, calibration damper and mounting bridge.


## Drawings

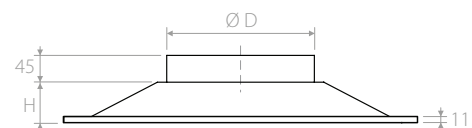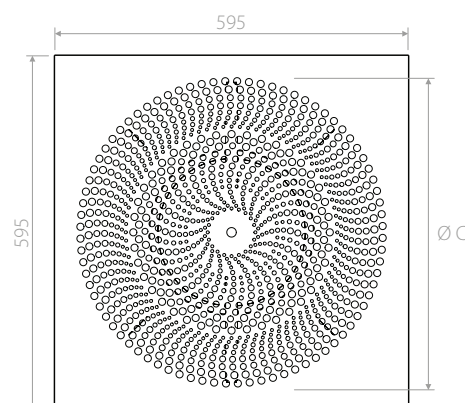


## Dimensions

| Type | C (mm) | D (mm) | H (mm) |
|------|--------|--------|--------|
| 125  | 300    | 123    | 45     |
| 160  | 380    | 157    | 55     |
| 200  | 460    | 197    | 68     |
| 250  | 540    | 247    | 68     |

### PQZ2

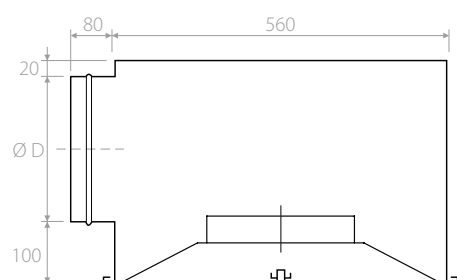

### PQZI2

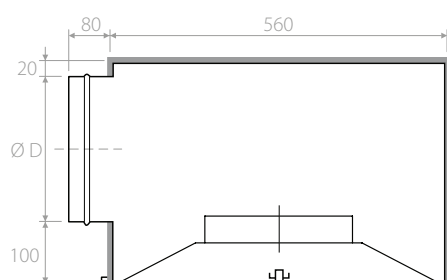

## Selection table

| Model    | P [m³/h] |     | L <sub>WA</sub> [dB(A)] |     | X <sub>(0,20)</sub> [m] |     | Dp <sub>t</sub> [Pa] |     |
|----------|----------|-----|-------------------------|-----|-------------------------|-----|----------------------|-----|
|          | min      | max | min                     | max | min                     | max | min                  | max |
| DIC1 125 | 60       | 100 | 25                      | 40  | 0,2                     | 0,5 | 20                   | 40  |
| DIC1 160 | 110      | 190 | 25                      | 40  | 1,9                     | 2,7 | 20                   | 40  |
| DIC1 200 | 230      | 300 | 25                      | 40  | 2,3                     | 3,6 | 20                   | 40  |
| DIC1 250 | 300      | 375 | 25                      | 40  | 2,2                     | 2,9 | 20                   | 40  |