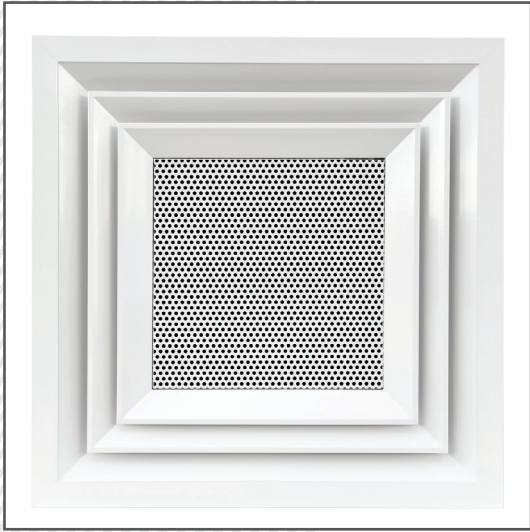


**Characteristics**


Supply and extraction multidirectional diffuser.
For modular false-ceiling installation for contemporary air supply and return.
Installation height: 2,5-3,1m.



Material

Supply part in aluminium and galvanized steel part of return all painted RAL 9010.


Fixing

Fixing on false-ceiling.

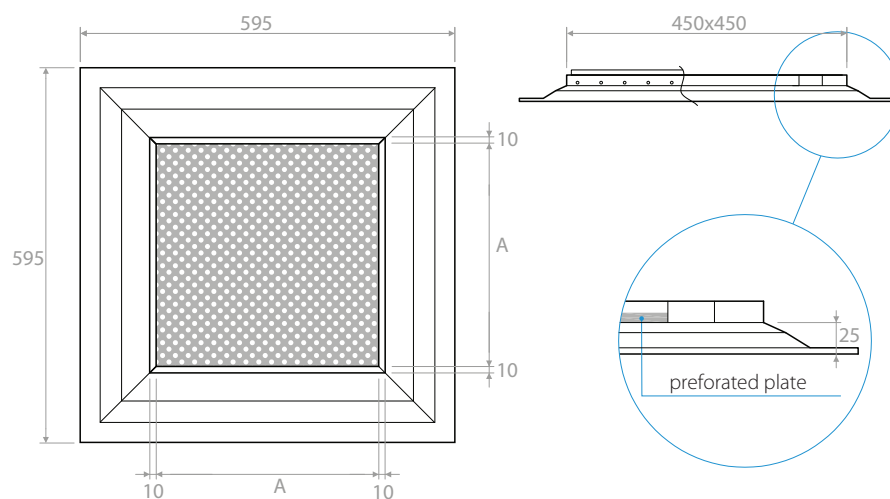Drawing

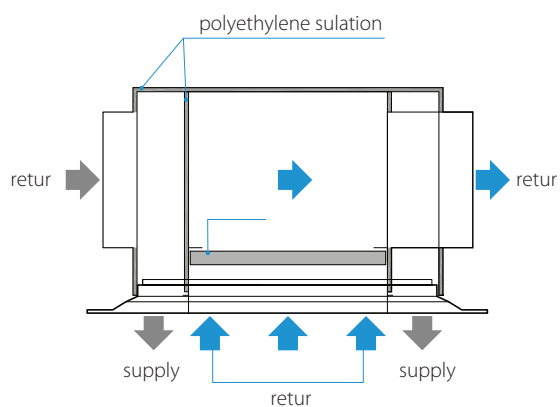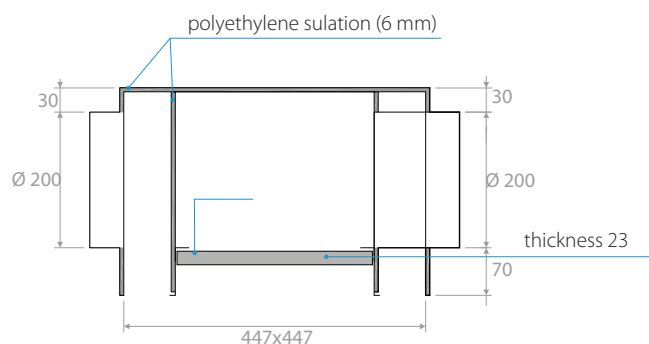

Quick selection diagram

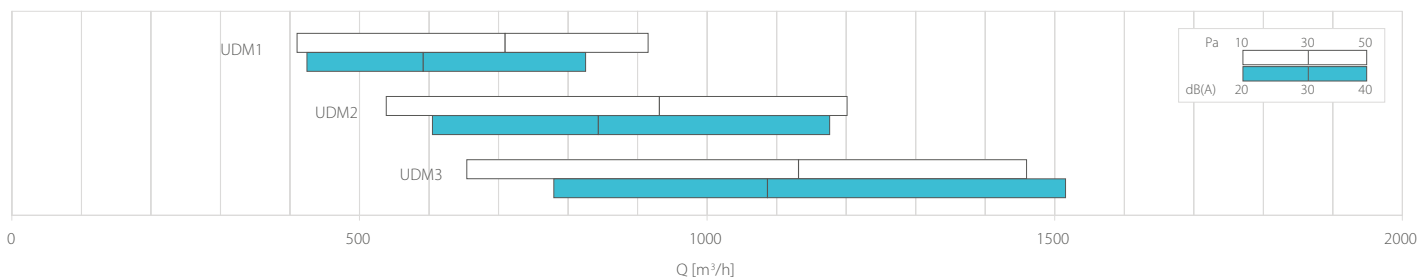

Selection table

Model	A_k [m ²]	Število smeri	Q [m ³ /h]		L _{WA} [dB(A)]		X _(0,25) [m]		Dp _t [Pa]	
			min	max	min	max	min	max	min	max
UDM600x600 1F	0,0438	4	410	920	< 20	43	1,26	6,29	10	50
UDM600x600 2F	0,0542	4	540	1200	< 20	41	1,22	6,10	10	50
UDM600x600 3F	0,0631	4	650	1460	< 20	39	1,19	5,97	10	50