



Characteristics

One slot supply and extraction multidirectional diffuser with removable filter.
For modular false-ceiling installation for contemporary air supply and return.
Installation height: 2,5-3,1m.


Material

Supply part in aluminium and galvanized steel part of return all painted RAL 9010.


Fixing

Fixing on false-ceiling.

Diffuzor UDM-7

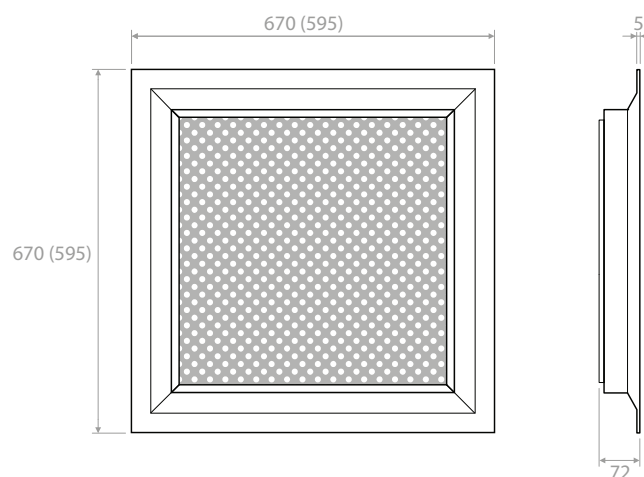

Plenum

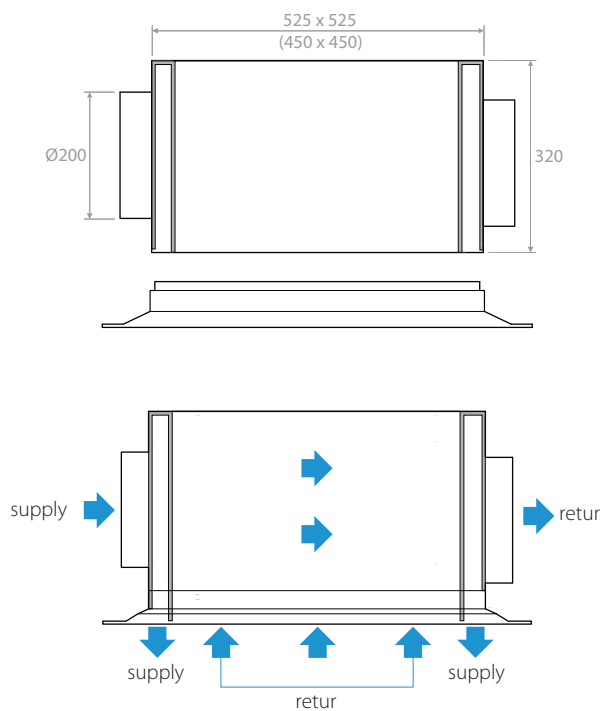

Selection table

Model	A_k [m ²]	Število smeri	Q [m ³ /h]		L_{WA} [dB(A)]		$X_{(0,25)}$ [m]		Dp_t [Pa]	
			min	max	min	max	min	max	min	max
UDM7 600x600	0,0480	4	470	1050	< 20	43	0,95	5,85	10	50
UDM7 675x675	0,0570	4	600	1320	< 20	43	1,13	6,24	10	50

Drawings

